




Data-Sheet-Variable Vacuum Capacitor CKTB250/28/138



www.glvac.cn

Specification	
Capacity C_{max} (nominal)	250pF
Capacity C_{min} (nominal)	15pF
Voltage (Peak Test U_{pt} /Peak Working U_{pw})	40kV/24kV
Capacity tolerance (liner Range)	10%
Max. Current I_{max} at 13.56MHz with Conduction Cooling	138Arms
Capacitance per turn	13.5pF/turn
Torque	≤ 1.5 N.m
Net Weight	5.5kg

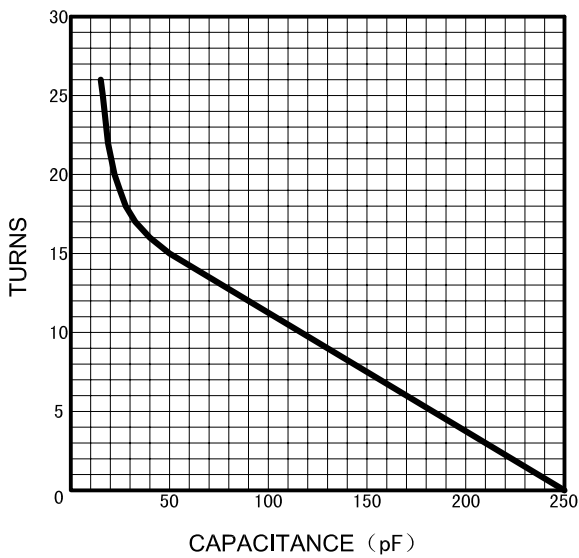

BOTH ENDS ALTERNATING 6 HOLES 1/4"-20 UNC 0.35 INCHES DEEP MIN AND 6 HOLES M6 9 MM DEEP MIN

